



YLI ELECTRONIC

Hand inductive switch

Model: YAD-130BT




1 Safety instructions



Thank you for choosing us. Please read this instruction before your installation


2 Product overview

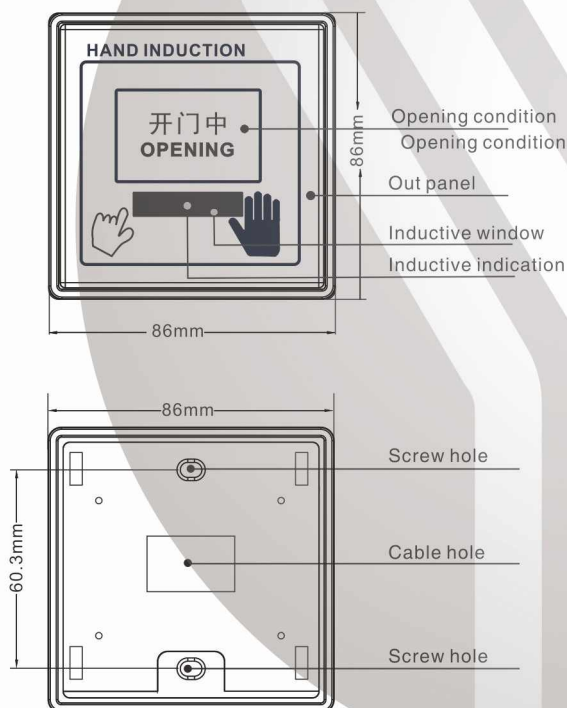

3 Character

- Infrared inductive switch with press or both function
- Open the door with hand(or reflective object) induction, it is clean and no pollution
- The induction distance:1—20cm(adjustable), set the distance based on your requirement
- High sensitive Infrared counter tube, Quick and convenient
- Adopt Infrared modulation and demodulation, there is no disturbance or to be disturbed
- 86 model board installation design meet your convenient installation freely
- Laser engraving process in the panel with back light display, the style is new and fashion
- Relay contact output, it is ready for any control equipment to connect

4 Connection guidance

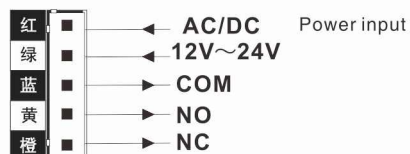


5 Adjust the induction distance



Open the cover, adjust the induction distance. Turn clockwise, it is be farther and turn counterclockwise, it will be closer.

Adjust the induction distance



Turn clockwise, it is be farther and turn counterclockwise, it will be closer. Maximum distance is 20cm

6 Application



The best inductive switch for clean house(Operation room, decontamination room etc)



The door inductive switch in Restaurant and so on

7 Technology data

Power input:	AC/DC12V~24V
Induction distance:	1—20cm(Adjustable)
Modulation and demodulation Frequency:	38KHZ
Action current:	43mA(DC12V)
Standby Current:	8mA(DC12V)
Dimension:	86×86×14mm