



YLI ELECTRONIC




# Australian Standard Heavy Duty Electric Strike W/Signal(Stainless steel)

Model:YS-137-S(SS304)

## Specification

|                    |                                     |
|--------------------|-------------------------------------|
| Dimension          | 175.5L*37W*26.8H(mm)                |
| Voltage            | DC12V (DC24V Customized)            |
| Current            | 12V/320mA±20%; 24V/200mA±20%        |
| Material           | 304 Stainless Steel                 |
| Feature            | Fail Safe / Fail Secure adjustable  |
| Door status sensor | NO/NC/COM                           |
| Lock status sensor | NO/NC/COM                           |
| Durable design     | Mechanical test: 1, 000, 000 times  |
| Suitable for       | Australian Standard Mechanical Lock |
| Door Swing         | 90 degrees                          |
| Weight             | 0.5kg                               |

## Diagram(unit:mm)

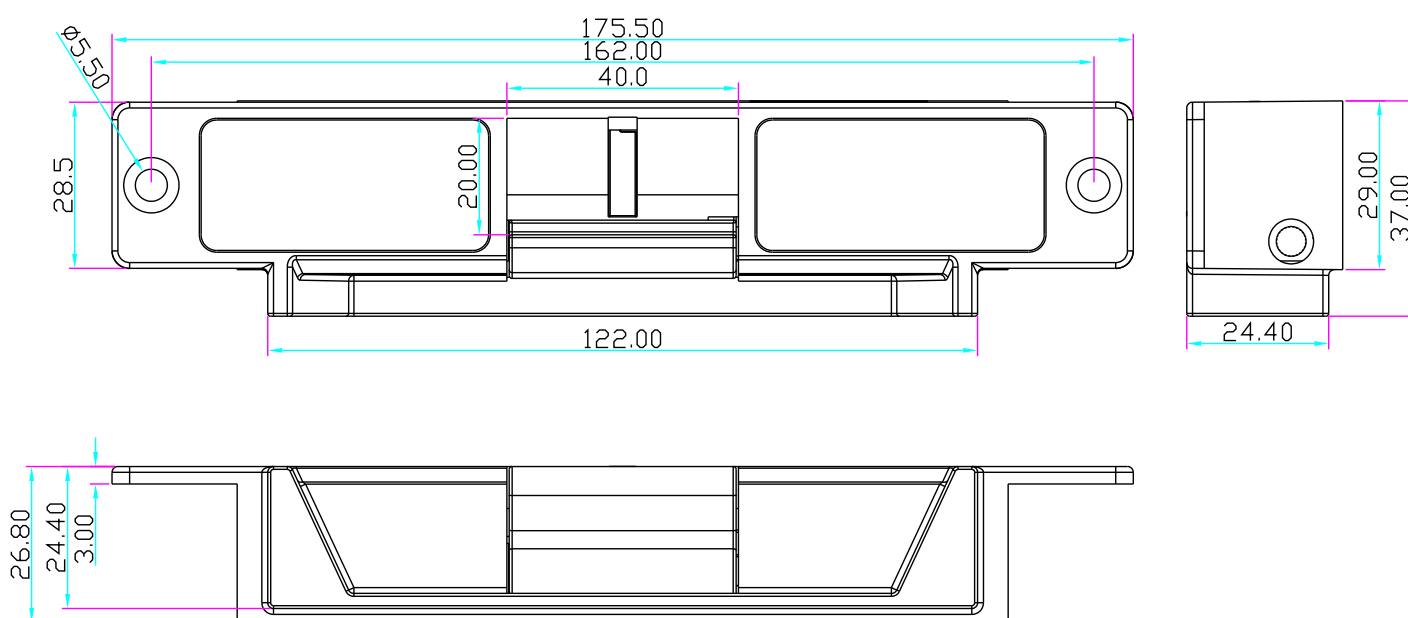

## Signal Output

N.C. contact or access relay for fail safe setting.  
N.O. contact or access relay for fail secure setting.



Green: NO  
White: COM  
Yellow: NC

### Door Status

N.C. contact output : open status  
N.O. contact output : closed status


Blue: NO  
Grey: COM  
Orange: NC

### Locked or Unlocked Status

N.O. contact output : unlocked status  
N.C. contact output : locked status

Red: +  
Black: -

## Adjustment

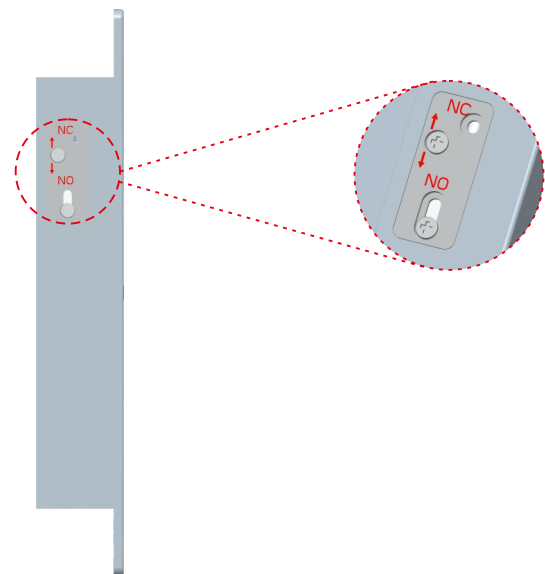


You can set the operation mode of Fail Safe or Fail Secure.

Loose the screw and tighten it in the other hole.

Fail Safe(NC): When power off, the door is in the open status.

Fail Secure(NO): When power off, the door is in the closed status.

## Installation Diagram

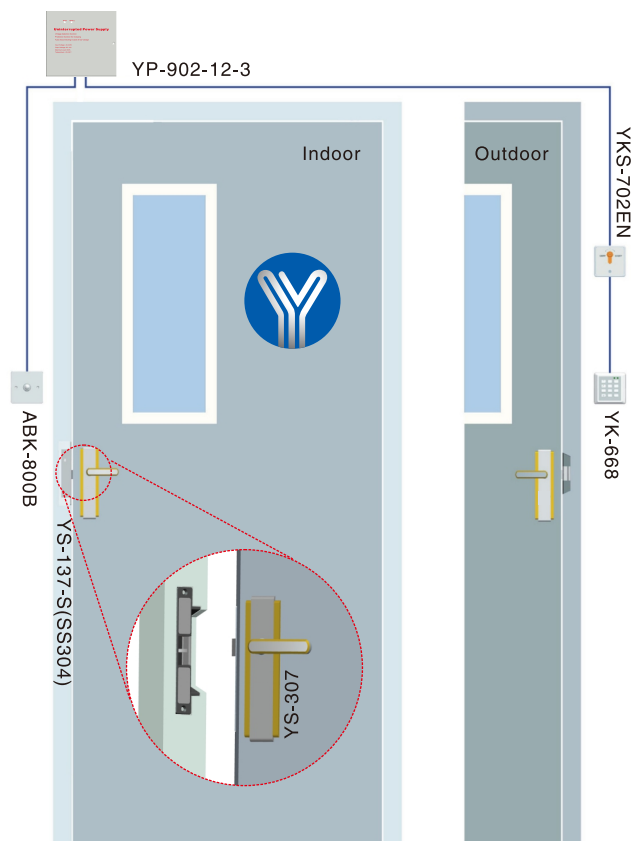

## Overall Dimensions

