



YLI ELECTRONIC


Long-type European standard waterproof electric strike

Model: YS-138LK-IP

Specification

Dimension	250Lx43.7Wx35H(mm)
Voltage	DC 12V(Default); DC 24V(Order)
Current	12V/320mA;24V/160mA
Strike Structure	304 Stainless Steel
Waterproof Level	IP65
Feature	Fail secure(NO);Fail safe(NC)
Suitable for	Wooden door/Metal door/Glass door/PVC door
Suitable Temperature	-10℃~+55℃(14-131F)
Operating Humidity	0~95%
Durable design	Mechanical test: 1, 000, 000 times
Weight	0.38kg/0.4kg/0.42kg

Diagram(unit:mm)

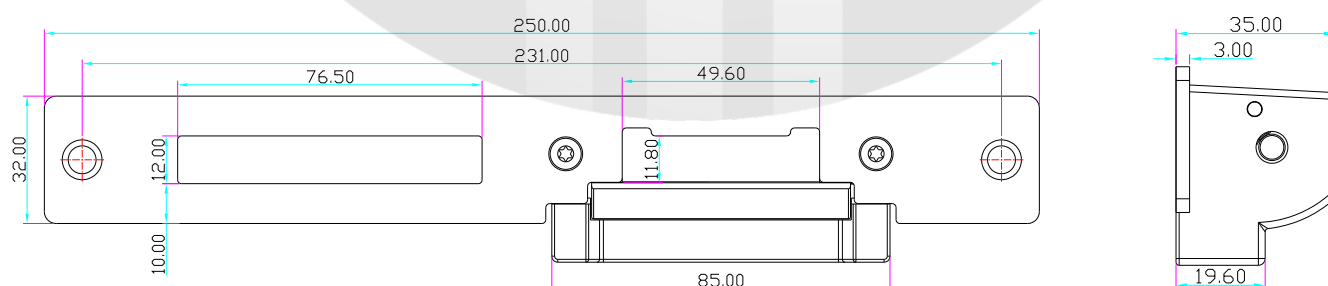


Signal Output

Door Status


Red: +
Black: -

DC 12V(Default); DC 24V(Order)

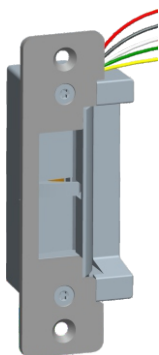


Accessories

If the door frame is too thick, please use the extension plate. Installation is as the follows.



25mm 50mm

Extension plate(need order)

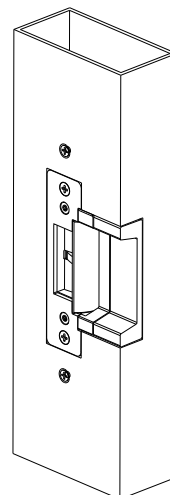


Function Conversion

You can set the operation mode of Fail Safe or Fail Secure.


Loose the screw and tighten it in the other hole.

Fail Safe(NC): When power off, the door is in the open status.

Fail Secure(NO): When power off, the door is in the closed status.



Fail Secure




Fail Safe


Options of Mechanical Lock

Suitable for: YS-138, YS-138L

Suitable for: YS-138LK

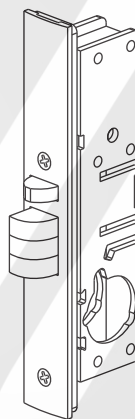


YS-305/306

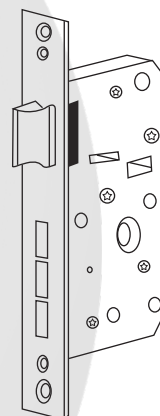

YS-308

Installation Diagram

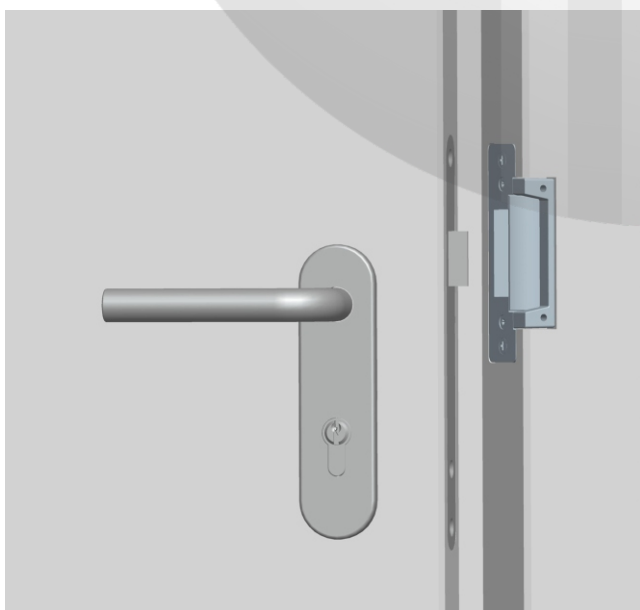

Overall Dimensions

