



面板尺寸	250長x25寬x31高(mm)
工作電壓	12VDC
工作電流	200mA
防水等級	IP65
安全類型	斷電關門(YS-132NO-IP) 斷電開門(YS-132NC-IP)
適用門適	木門、金屬門
產品重量	0.4kg

Technical drawing of the 1000mm long mechanical lock assembly, showing front, side, and detail views with dimensions in mm.

Front View Dimensions:

- Total length: 250.00
- Distance from left edge to first hole center: 29.00
- Distance between first and second hole centers: 74.00
- Distance from second hole center to edge of lock body: 40.00
- Distance from edge of lock body to center of lock body: 42.00
- Distance from center of lock body to right edge: 62.10
- Hole diameter: 12.00
- Lock body width: 47.80
- Distance from left edge to top of lock body: 25.00
- Distance from left edge to bottom of lock body: 13.00
- Radius of left corner: R3.00
- Distance from bottom of lock body to bottom of mounting plate: 5.60

Side View Dimensions:

- Lock body height: 31.00
- Distance from left edge to center of lock body: 95.00
- Distance from center of lock body to right edge: 29.30
- Distance from bottom of lock body to bottom of mounting plate: 3.00


Detail View Dimensions:

- Lock body height: 31.00
- Distance from left edge to center of lock body: 3.00
- Distance from center of lock body to right edge: 3.00

Assembly Note: 選用機械鎖 (Select mechanical lock)



安裝步驟

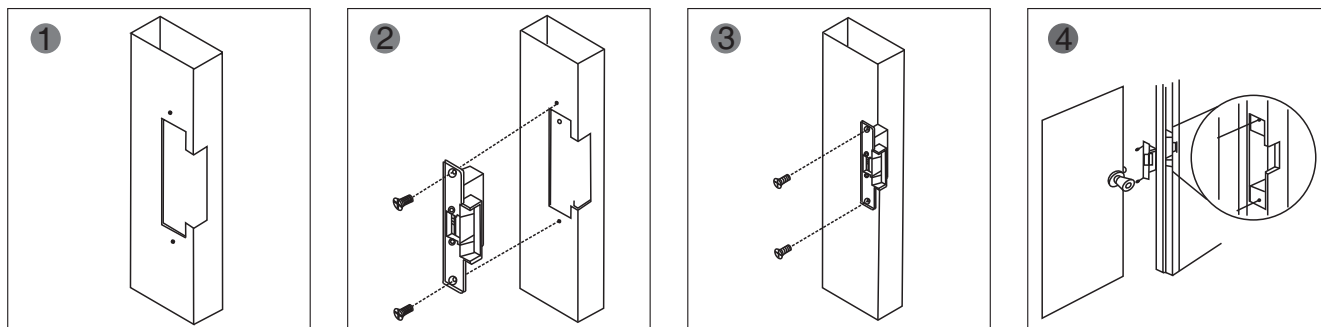


根據電鎖口尺寸進行切割。

將電鎖口安裝在切割好的位置，接上電源，并且進行測試。


固定電鎖口

完成圖

選用門型

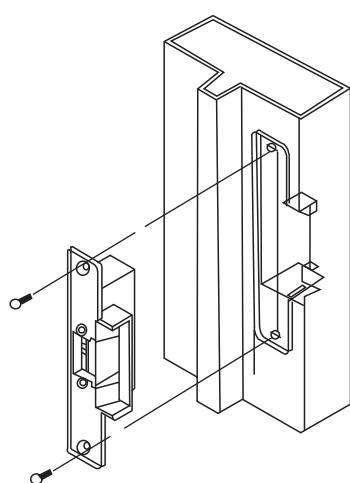

金屬門框

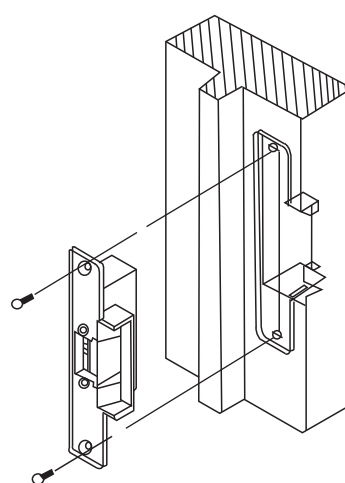

木質門框

安裝接綫圖

